

## MD SERIES - SPECIFICATION DATA SHEET 1.9



[www.kirkkey.com](http://www.kirkkey.com)

**Luft Brasil Ind. Com. Ltda**

R. Dom Andrés Lamas, 56

Tataupé São Paulo - SP

(11) 3795-0000

[www.luftbrasil.com.br](http://www.luftbrasil.com.br)



**Type U - End Mounted**



The Type U interlock is designed for applications where space is limited. It can be fastened through the lock body with 3/8" bolts or panel mounted with 10-32 bolts from the bottom of the lock body.

The interlock housing is made from brass. The locking bolt is made of 5/8" diameter stainless steel. The throw, or travel, of the locking bolt is 3/4". Lock bolt movement is completely controlled by the rotation of the key.

### OPTIONS

- Locking Bolt Length - when ordering, specify the length of the locking bolt in the withdrawn position. Standard lengths are 1/4", 3/8", 1/2", 3/4", 1", 2", and 3". Non-standard lengths are also available. (1" Lock Bolt shown on drawing)
- Key Removable - the key is removable when the locking bolt is either in the extended "E" or withdrawn "W" position. Please choose "E" or "W" when ordering an interlock. Key removable extended is the most common because the locking bolt is typically extended to block/engage something.
- Stamp Key Interchange - specify an alphanumeric code to be stamped on the cylinder face and the key (e.g. A1, A2, B1, etc. - up to 5 characters). See MD Series Data Sheet for Keys (3.4) and Terminology (4.1) for details.
- Dust Covers - see MD Series Data Sheet for Dust Covers (3.1) for details.
- Mounting Bolts - see MD Series Data Sheet for Mounting Bolts (3.2) for details.

# MD SERIES - SPECIFICATION DATA SHEET 1.9



www.kirkkey.com


Luft Brasil Ind. Com. Ltda

R. Dom Andrés Lamas, 56  
Tataupé São Paulo - SP  
(11) 3795-0000

[www.luftbrasil.com.br](http://www.luftbrasil.com.br)



**Type U - End Mounted**

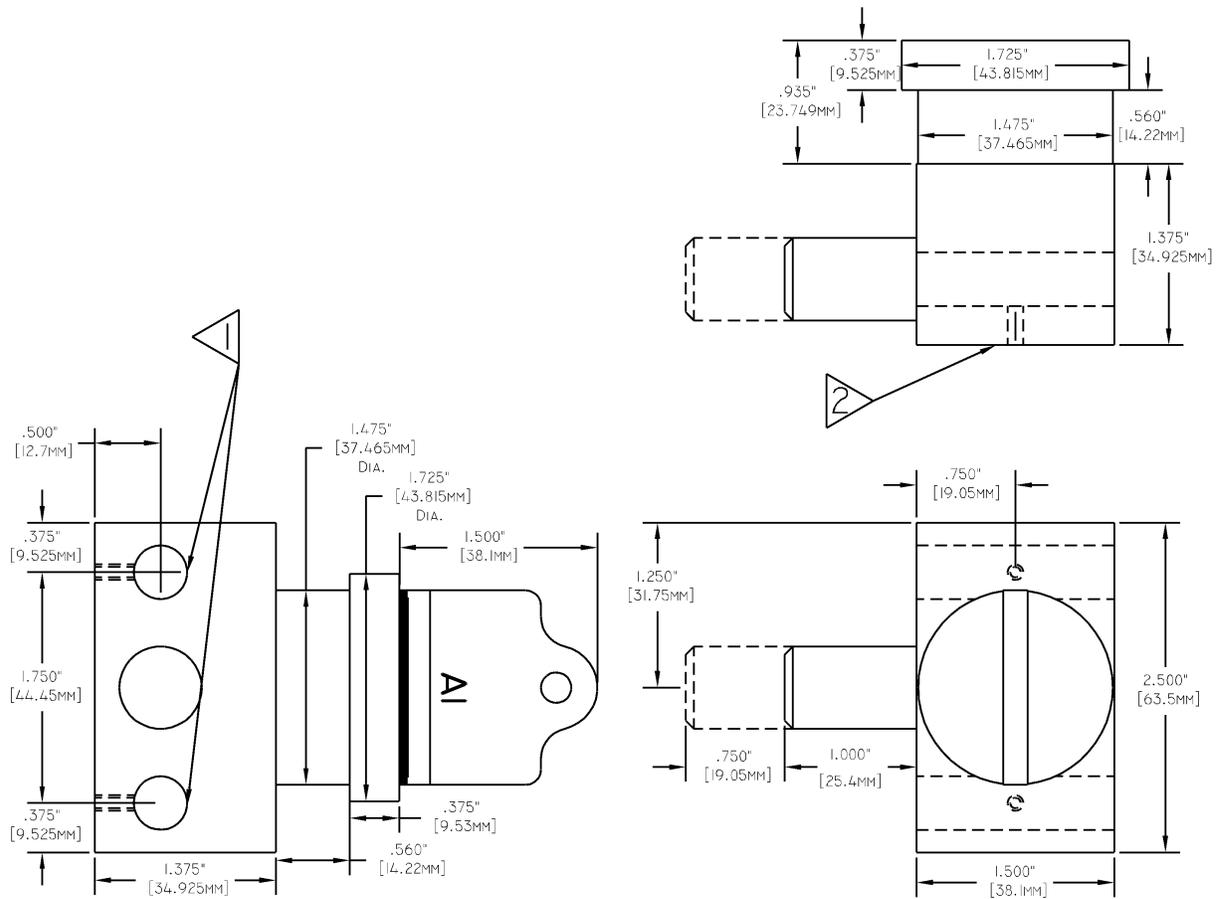

**NOTES:**

- 1) 0.4062" (10.32mm) holes for mounting bolts.
- 2) 10-32 tapped holes (2) places.