

MD SERIES - SPECIFICATION DATA SHEET 1.1



www.kirkkey.com

Luft Brasil Ind. Com. Ltda

R. Dom Andrés Lamas, 56

Tataupé São Paulo - SP

(11) 3795-0000

www.luftbrasil.com.br



Type F - Flat Mounted



The Type F interlock is generally flat or face mounted with bolts through the front of the housing. Many breaker, switch and T/R manufacturers offer provisions for mounting Type F interlocks.

The interlock housing is made from brass. The key, lock bolt and all internal parts are constructed from 316 stainless steel. The lock bolt is 5/8" diameter and the throw, or travel, of the lock bolt is 3/4". Lock bolt movement is completely controlled by the rotation of the key (or keys in a multi-cylinder interlock).

OPTIONS

Locking Bolt Length – When ordering, specify the length of the locking bolt in the withdrawn position. Standard lengths are 0", 1/4", 3/8", 1/2", 3/4", 1", 2", and 3". Non-standard lengths are also available (1" lock bolt shown on drawing).

Key Removable - the key(s) is removable when the locking bolt is either in the extended (E) or withdrawn (W) position. Please choose E or W when ordering an interlock. NOTE: Key removable extended is the most common because the locking bolt is typically extended to block/engage something.

Multi-Cylinder - up to 3 cylinders available. Please specify E or W key removable position for each cylinder. NOTE: on MD Series Type F interlocks, "W" cylinders will be located nearest the locking bolt.

- **Stamp Key Interchange** - specify an alphanumeric code to be stamped on the cylinder face and the key (e.g. A1, A2, B1, etc. - up to 5 characters). See MD Series Data Sheet for Keys (3.4) and Terminology (4.1) for details.
- **Auxiliary Switches** - see MD Series Data Sheets for Type Thermoplastic (2.3) and Type S (2.4) for details.
- **Dust Covers** - see MD Series Data Sheet for Dust Covers (3.1) for details.
- **Mounting Bolts** - see MD Series Data Sheet for Mounting Bolts (3.2) for details.

MD SERIES - SPECIFICATION DATA SHEET 1.1



www.kirkkey.com

Luft Brasil Ind. Com. Ltda

R. Dom Andrés Lamas, 56


Tataupé São Paulo - SP

(11) 3795-0000

www.luftbrasil.com.br



Type F - Flat Mounted

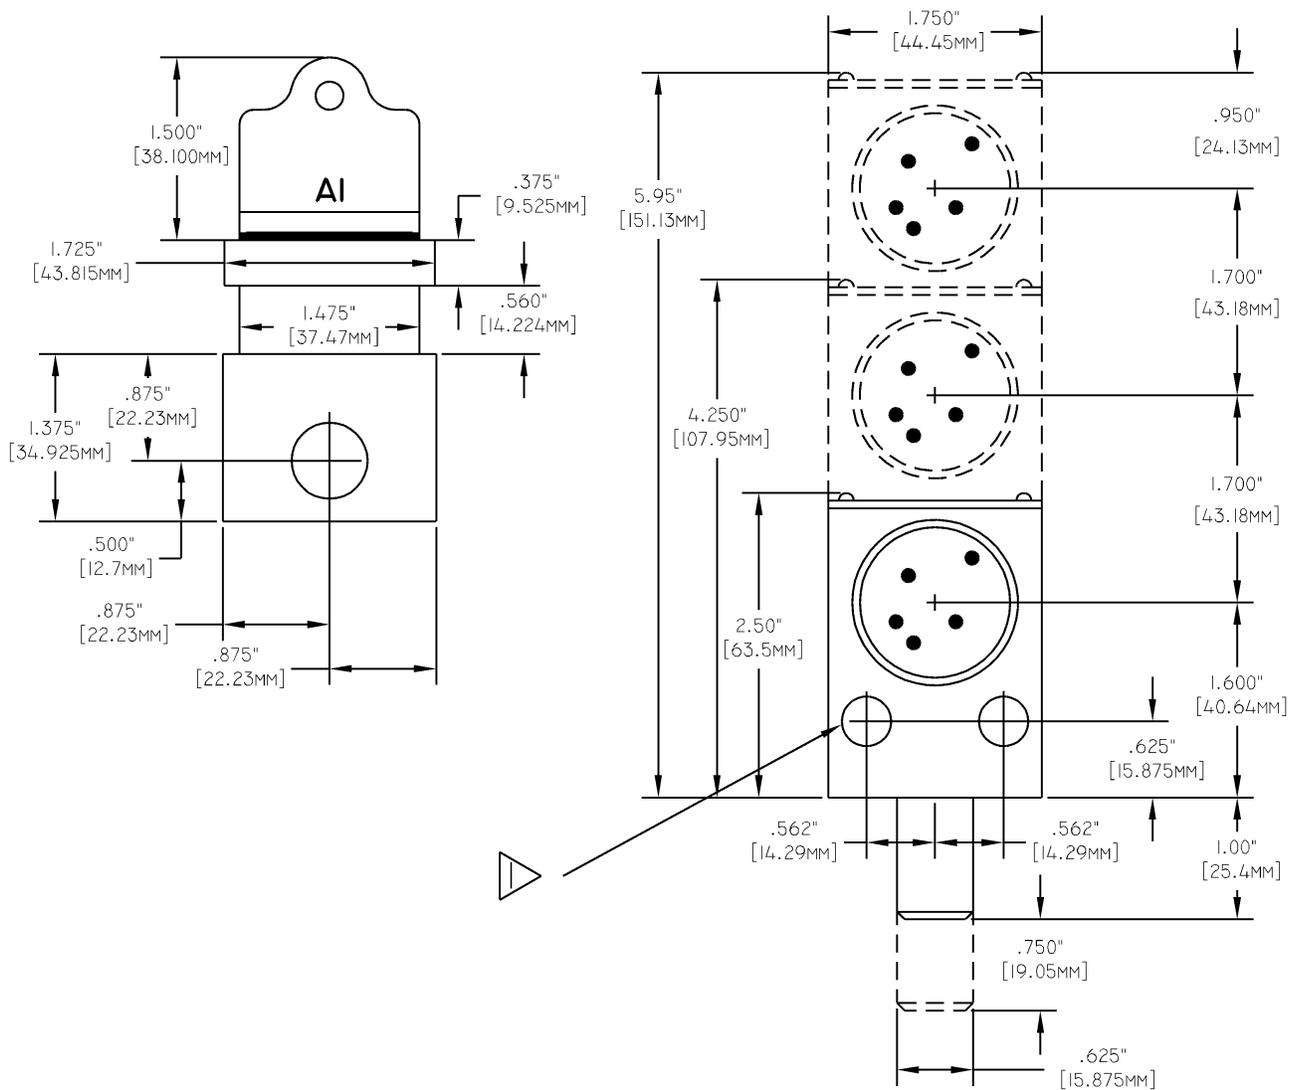

NOTES:

1) 0.4062" (10.32mm) holes for mounting bolts (2 holes).